


## Solid Tint International Standards Conformity Report

Lens Code: <input type="text" value="CR FU INFRARED VERDE"/> Production Line: <input type="text"/> Operator: <input type="text" value="Serena Contato"/> Base: <input type="text"/> Note: <input type="text"/> Info: <input type="text"/>	Date: <input type="text" value="04/05/2023"/> Time: <input type="text" value="11:25"/>	
Equipment: <input type="text" value="S_C_P_S 1.8"/> S/N: <input type="text" value="07E0.0006"/>		Additional required information This is not suitable for: - direct viewing of the sun - for use in twilight or at night - protection against sources of radiation other

### American National Standard ANSI Z80.3-2018

Luminous Transmittance  %

Primary Function:

Warnings:

### International Standard ISO 12312-1:2013/Amd.1:2015

Luminous Transmittance (Tv)  %

Filter Category:

Descriptive Label:

Warnings:

### Australian/New Zealand Standard AS/NZS 1067.1:2016

Luminous Transmittance (Tv)  %

Filter Category:

Descriptive Label:

Warnings:

### VISIBLE SPECTRAL RANGE

Traffic signal transmittance

Red	21,11 %	Min> 8,00	<input type="text" value="PASS"/>
Yellow	15,28 %	Min> 6,00	<input type="text" value="PASS"/>
Green	15,64 %	Min> 6,00	<input type="text" value="PASS"/>

Spectral transm (475-650)  Min> 0,20

### VISIBLE SPECTRAL RANGE

Dection of signal light: **INCANDESCENT LIGHT**

QRed	1,18	Min> 0,80	<input type="text" value="PASS"/>
QYellow	0,99	Min> 0,60	<input type="text" value="PASS"/>
QGreen	0,97	Min> 0,60	<input type="text" value="PASS"/>
QBlue	1,31	Min> 0,60	<input type="text" value="PASS"/>

Spectral transm (475-650)  Min> 3,11

### VISIBLE SPECTRAL RANGE

Dection of signal light: **INCANDESCENT LIGHT**

QRed	1,18	Min> 0,80	<input type="text" value="PASS"/>
QYellow	0,99	Min> 0,60	<input type="text" value="PASS"/>
QGreen	0,97	Min> 0,60	<input type="text" value="PASS"/>
QBlue	1,31	Min> 0,70	<input type="text" value="PASS"/>

Spectral transm (475-650)  Min> 3,11

### UV SPECTRAL RANGE

Mean EUV (280-315)	0,01 %	Max< 1,95	<input type="text" value="PASS"/>
Mean NUV (315-380)	0,01 %	Max< 15,59	<input type="text" value="PASS"/>
BlueLight Tsb (380-500)	20,71 %		

COLOR LIMITS	X	Y	
Green	0,186	0,342	<input type="text" value="PASS"/>
Yellow	0,598	0,401	<input type="text" value="PASS"/>
D65	0,290	0,285	<input type="text" value="PASS"/>

### UV SPECTRAL RANGE


Tsuva (315-380)	0,01 %	Max< 7,77	<input type="text" value="PASS"/>
Tsubv (280-315)	0,01 %	Max< 1,00	<input type="text" value="PASS"/>
Tsuv (280-380)	0,01 %		
Tsb (380-500)	20,71 %		

### UV SPECTRAL RANGE

Tsuva (315-400)	0,02 %	Max< 7,77	<input type="text" value="PASS"/>
Tsubv (280-315)	0,01 %	Max< 0,78	<input type="text" value="PASS"/>
Tsuv (280-400)	0,02 %		
Tsb (380-500)	20,71 %		

See color Limit of acceptance on a CIE (1931) chromatic diagram

Color Limit Region of Acceptance

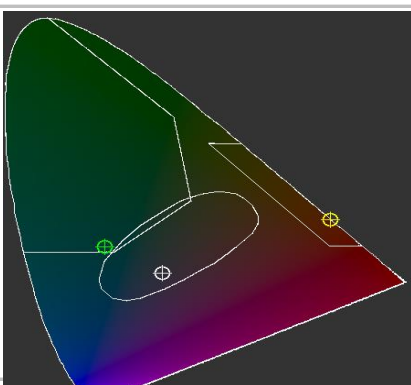

Spectral Transmittance

