


## Solid Tint International Standards Conformity Report

Lens Code: <input type="text" value="CR 1886 SP ORO"/> Production Line: <input type="text"/> Operator: <input type="text" value="SERENA CONTATO"/> Base: <input type="text"/> Note: <input type="text"/> Info: <input type="text"/>	Date: <input type="text" value="19/01/2022"/> Time: <input type="text" value="16:05"/>	
Equipment: <input type="text" value="S_C_P_S 1.8"/> S/N: <input type="text" value="07E0.0006"/>		Additional required information This is not suitable for: - direct viewing of the sun - for use in twilight or at night - protection against sources of radiation other

### American National Standard ANSI Z80.3-2018

Luminous Transmittance  %

Primary Function:

Warnings:

### International Standard ISO 12312-1:2013/Amd.1:2015

Luminous Transmittance (Tv)  %

Filter Category:

Descriptive Label:

Warnings:

### Australian/New Zealand Standard AS/NZS 1067.1:2016

Luminous Transmittance (Tv)  %

Filter Category:

Descriptive Label:

Warnings:

### VISIBLE SPECTRAL RANGE

Traffic signal transmittance

Red	21,83 %	Min > 8,00	<input type="text" value="PASS"/>
Yellow	14,61 %	Min > 6,00	<input type="text" value="PASS"/>
Green	11,89 %	Min > 6,00	<input type="text" value="PASS"/>

Spectral trans (475-650)  Min > 0,20

### VISIBLE SPECTRAL RANGE

Dection of signal light: **INCANDESCENT LIGHT**

QRed	1,42	Min > 0,80	<input type="text" value="PASS"/>
QYellow	1,12	Min > 0,60	<input type="text" value="PASS"/>
QGreen	0,94	Min > 0,60	<input type="text" value="PASS"/>
QBlue	1,02	Min > 0,60	<input type="text" value="PASS"/>

Spectral trans (475-650)  Min > 2,57

### VISIBLE SPECTRAL RANGE

Dection of signal light: **INCANDESCENT LIGHT**

QRed	1,42	Min > 0,80	<input type="text" value="PASS"/>
QYellow	1,12	Min > 0,60	<input type="text" value="PASS"/>
QGreen	0,94	Min > 0,60	<input type="text" value="PASS"/>
QBlue	1,02	Min > 0,70	<input type="text" value="PASS"/>

Spectral trans (475-650)  Min > 2,57

### UV SPECTRAL RANGE

Mean EUV (280-315)	0,03 %	Max < 1,61	<input type="text" value="PASS"/>
Mean NUV (315-380)	0,07 %	Max < 12,90	<input type="text" value="PASS"/>
BlueLight Tsb (380-500)	8,26 %		

### COLOR LIMITS

	X	Y	
Green	0,221	0,431	<input type="text" value="PASS"/>
Yellow	0,603	0,396	<input type="text" value="PASS"/>
D65	0,365	0,362	<input type="text" value="PASS"/>

### UV SPECTRAL RANGE


Tsuva (315-380)	0,06 %	Max < 6,42	<input type="text" value="PASS"/>
Tsub (280-315)	0,03 %	Max < 1,00	<input type="text" value="PASS"/>
Tsuv (280-380)	0,05 %		
Tsb (380-500)	8,26 %		

### UV SPECTRAL RANGE

Tsuva (315-400)	0,05 %	Max < 6,42	<input type="text" value="PASS"/>
Tsub (280-315)	0,03 %	Max < 0,64	<input type="text" value="PASS"/>
Tsuv (280-400)	0,05 %		
Tsb (380-500)	8,26 %		

See color Limit of acceptance on a CIE (1931) chromatic diagram

Color Limit Region of Acceptance

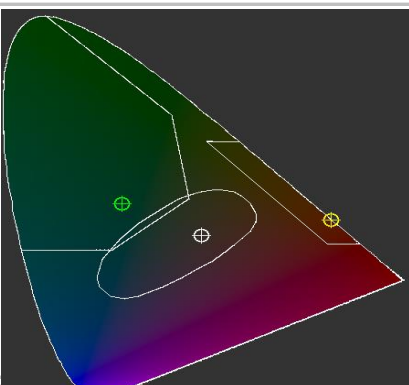

Spectral Transmittance

